

SOFTWARE PRODUCT DESCRIPTION

Charon-SSP Version 2.0

Document version 55-15-005-001



DESCRIPTION

Charon-SSP is a member of Charon cross-platform hardware virtualization product family that creates a virtual replica of sun4m and sun4u SPARC family members on a standard x86-x64 computer system running on top of physical hardware, Linux operating system, or a Hypervisor. Charon-SSP lets users of end of life SPARC servers/stations to continue using their applications without any changes while lowering operational costs and energy consumption. Multiple instances can run on a single X86 standard host or existing virtualization infrastructure providing the benefits of consolidation, easy management and maintenance of these legacy systems.

Charon-SSP provides three virtualized SPARC models:

- Charon-SSP/4M based on SPARC-V8 32-Bit processor specification, MBUS for Processors/Memory interconnection and SBUS for IO peripherals.
- Charon-SSP/4U based on SPARC-V9 64-bit processor specification, UPA bus for Processor/Memory interconnection and PCI bus for IO peripherals.
- Charon-SSP/4U+ same as /4U using Intel VT-x / EPT to offload SPARC MMU operations onto hardware. This requires running on dedicated Intel host.

NETWORK

Charon-SSP maps 1 host physical Ethernet adapter for each emulated NIC or can bridge a physical Ethernet adapter with a number of tap devices to allow communication between Charon-SSP instances and the Linux host while multiplexing the physical Ethernet adapter for external communication. All Solaris network protocols are supported transparently as well as Solaris IP multipathing and Solaris VNICs. Network booting and JumpStart installation is supported for Solaris 2.4 to Solaris 10.

GRAPHIC ENVIRONMENT

Solaris CDE, OpenWindow desktop and Java Desktop graphics environment are supported on Charon-SSP by nested X11 server running on the host. Native graphics are implemented via emulated CGTHREE, CGSIX and RageXL framebuffer with resolutions ranging from 800x600 to 1600x1280 pixels. Dual monitor configurations supported on these framebuffers for larger virtual desktops. Remote graphics client supported on Linux and Windows.

AUDIO

DBRI2 + CS4215 mmcodec virtualized components provide 8-bit/16-bit mono/stereo sound u-Law, a-Law, linear formats. Remote audio supported on Linux / PulseAudio server.

STORAGE

Charon-SSP provides virtualization for SCSI controllers and peripherals as follows:

- Virtual disks as container files residing on host file systems
- Raw partitions
- Physical disks / tapes.
- iSCSI targets

POWER SAVING

Charon-SSP provides a feature to reduce CPU power consumption on the Intel host when Solaris O.S. is idle. This feature can be enabled using the following options:

- **Balanced**
Uses Intel power saving instructions to disable pipeline and reduce energy consumption
- **Power save**
This option uses CPU thread suspension on Solaris IDLE condition to reduce host CPU usage.


MANAGEMENT

Charon Manager for Charon-SSP is a graphical user interface for creating, configuring and starting instances of virtual SPARC systems.

It also provides access to the virtual consoles and log files as well as the following tools:

- Create Virtual Disk/Tape/Floppy
- License viewer/update
- Host information
- Virtual network create/delete
- X11 server start/stop
- Console configuration

PERFORMANCE

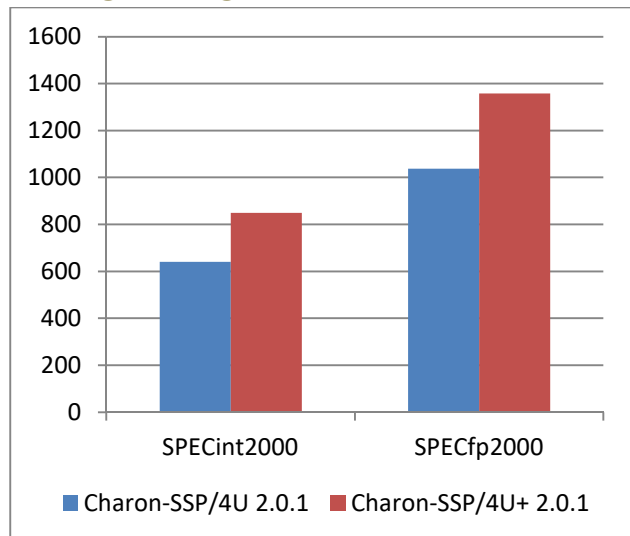

Single CPU test run on Charon-SSP/4U(+) with Solaris 10 on Intel 6th gen CORE i7-6700 @ 4.0GHz CPU

DISTRIBUTION

Charon-SSP is distributed as Baremetal. Installation ISO image contains everything needed after installation. Barebone version contains customized Linux and Charon-SSP together, or RPM packages for Oracle Linux, Red Hat, CentOS, are available upon request.



stromasys
engineered solutions

VIRTUALIZED HARDWARE

	Charon-SSP/4M (32 bit)	Charon-SSP/4U(+) (64 bit)
Number of SPARC CPUs (type Min/Max)	SPARC V8 1/4	SPARC V9 1/24
Emulated RAM	64MB to 512MB	1GB to 128GB
Bus type : Slots	SBUS: 12 slots	PCI: 16 slots
SCSI controllers	1	2
Maximum SCSI devices	7	30
Disks supported	physical/partition/vdisk	physical/partition/vdisk
CD/DVD support	physical/ISO image	physical/ISO image
Tape support	physical/vtape	physical/vtape
Ethernet Controllers	2	19
Serial Ports	10	34
Graphics Support	CGTHREE, CGSIX, X11 nested server	RAGE XL, CGSIX, X11 nested server
O.S. support	SunOS 4.1.3/4.1.4 Solaris 2.3 to Solaris 9	Solaris 2.5.1 to Solaris 10
Audio	DBRle+CS4215 codec	DBRle+CS4215 codec
PCI pass-through	-	NI IEEE488 GPIB Digi Serial Adapter

HOST REQUIREMENTS

Host	Description
Operating system	Oracle Linux, RHEL 7.x; CentOS 7.x (for Charon-SSP Baremetal and Barebone distributions no preinstalled OS is required).
Number of Cores	2 + Number of emulated processors per instance
Memory size	2GB + emulated memory per instance
Recommended Hardware	Intel Xeon Gold/Platinum CPUs; Desktop Core I7 Gen 8 or above; Frequency 3Ghz or above

Charon-SSP products and part numbers

Charon-SSP product	Emulated CPU type	CPU / RAM limitations	Perpetual/annual license ²⁾	GOLD/PLATINUM annual support ³⁾	GOLD/PLATINUM annual subscription ²⁾	Backup license ²⁾
Charon-SSP/4M L10	V8	1 / 512MB	CHSSP-L10-4MLIC-IP / CHSSP-L10-4MLIC-01	CHSSP-L10-4MGLD-01 / CHSSP-L10-4MPLT-01	CHSSP-L10-4MLIC-ICG / CHSSP-L10-4MLIC-ICP	CHSSP-L10-4MKEY-IK
Charon-SSP/4M L20	V8	4 / 512MB	CHSSP-L20-4MLIC-IP / CHSSP-L20-4MLIC-01	CHSSP-L20-4MGLD-01 / CHSSP-L20-4MPLT-01	CHSSP-L20-4MLIC-ICG / CHSSP-L20-4MLIC-ICP	CHSSP-L20-4MKEY-IK
Charon-SSP/4U L20	V9	4 / 4GB	CHSSP-L20-4ULIC-IP / CHSSP-L20-4ULIC-01	CHSSP-L20-4UGLD-01 / CHSSP-L20-4UPLT-01	CHSSP-L20-4ULIC-ICG / CHSSP-L20-4ULIC-ICP	CHSSP-L20-4UKEY-IK
Charon-SSP/4U L30	V9	8 / 16GB	CHSSP-L30-4ULIC-IP / CHSSP-L30-4ULIC-01	CHSSP-L30-4UGLD-01 / CHSSP-L30-4UPLT-01	CHSSP-L30-4ULIC-ICG / CHSSP-L30-4ULIC-ICP	CHSSP-L30-4UKEY-IK
Charon-SSP/4U L40	V9	12 / 64GB	CHSSP-L40-4ULIC-IP / CHSSP-L40-4ULIC-01	CHSSP-L40-4UGLD-01 / CHSSP-L40-4UPLT-01	CHSSP-L40-4ULIC-ICG / CHSSP-L40-4ULIC-ICP	CHSSP-L40-4UKEY-IK
Charon-SSP/4U L50	V9	24 / 128GB	CHSSP-L50-4ULIC-IP / CHSSP-L50-4ULIC-01	CHSSP-L50-4UGLD-01 / CHSSP-L50-4UPLT-01	CHSSP-L50-4ULIC-ICG / CHSSP-L50-4ULIC-ICP	CHSSP-L50-4UKEY-IK
Charon-SSP/4U+ L20	V9 (+) ¹⁾	4 / 4GB	CHSSP-L20-4U+LIC-IP / CHSSP-L20-4U+LIC-01	CHSSP-L20-4U+GLD-01 / CHSSP-L20-4U+PLT-01	CHSSP-L20-4U+LIC-ICG / CHSSP-L20-4U+LIC-ICP	CHSSP-L20-4U+KEY-IK
Charon-SSP/4U+ L30	V9 (+) ¹⁾	8 / 16GB	CHSSP-L30-4U+LIC-IP / CHSSP-L30-4U+LIC-01	CHSSP-L30-4U+GLD-01 / CHSSP-L30-4U+PLT-01	CHSSP-L30-4U+LIC-ICG / CHSSP-L30-4U+LIC-ICP	CHSSP-L30-4U+KEY-IK
Charon-SSP/4U+ L40	V9 (+) ¹⁾	12 / 64GB	CHSSP-L40-4U+LIC-IP / CHSSP-L40-4U+LIC-01	CHSSP-L40-4U+GLD-01 / CHSSP-L40-4U+PLT-01	CHSSP-L40-4U+LIC-ICG / CHSSP-L40-4U+LIC-ICP	CHSSP-L40-4U+KEY-IK
Charon-SSP/4U+ L50	V9 (+) ¹⁾	24 / 128GB	CHSSP-L50-4U+LIC-IP / CHSSP-L50-4U+LIC-01	CHSSP-L50-4U+GLD-01 / CHSSP-L50-4U+PLT-01	CHSSP-L50-4U+LIC-ICG / CHSSP-L50-4U+LIC-ICP	CHSSP-L50-4U+KEY-IK

¹⁾ Accelerated by offloading part of the emulated CPU workload onto hosting hardware

²⁾ Please contact Stromasys Sales team for Charon licensing details

³⁾ Please refer to Charon Service Descriptions for GOLD and PLATINUM terms, conditions, and SLAs

« Copyright © 2018 Stromasys Inc. All rights reserved. Charon name / logo is a trademark of Stromasys SA »

STROMASYS INC

Americas Region
2840 Plaza Place,
Ste 450
Raleigh, NC 27612
United States of America
Phone: +1 919 239 8450
Fax: +1 919 239 8451
us.sales@stromasys.com

STROMASYS SA

Europe, Middle East & Africa
Avenue Louis-Casai 84
5^e Floor
1216 Cointrin
Switzerland
Phone: +41 22 794 1070
Fax: +41 22 794 1073
emea.sales@stromasys.com

STROMASYS ASIA PACIFIC LTD

Asia Pacific Region
29/F, Room D, Tower B, Billion Centre
1 Wang Kwong Road
Kowloon Bay
Hong Kong
Phone: +852 2853 1600
Fax: +852 2853 1699
apac.sales@stromasys.com



stromasys
engineered solutions